

# VBU25N Ancillaries

Tel: +44 (0) 1274 550500  
 Fax: +44 (0) 1274 550501  
 Email: [sales@aerovac.com](mailto:sales@aerovac.com)  
 Website: [www.aerovac.com](http://www.aerovac.com)


- Vacuum breach units (VBUs) enable the vacuum bag to be evacuated. Also known as through bag connectors, they are manufactured from steel and aluminium, to a very high standard.
- The 3 part VBU includes a high temperature silicone rubber washer, base unit, nurlled ring and washer plate to achieve an effective vacuum seal.
- Used extensively in both oven and autoclave applications.

#### PHYSICAL PROPERTIES

- Maximum use temperature
- Standard thread size

250°C

¼" BSP

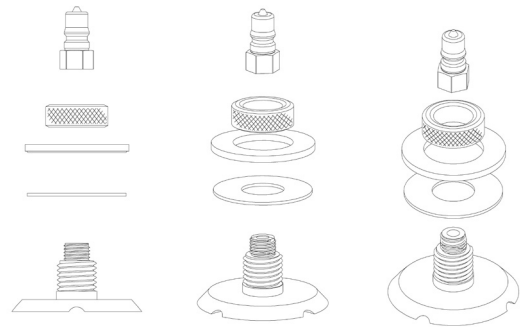

The image above shows VBU with non-return plug

#### AVAILABILITY & PACKAGING

- Availability

76mm (3") diameter base  
 50mm (2") diameter base

#### STORAGE & HANDLING

- No special requirements.
- Handling of these products must conform to individual company guidelines and health and safety regulations.

Aerovac Systems Ltd  
[www.aerovac.com](http://www.aerovac.com)

Aerovac Systems Italy S.r.l  
[www.aerovac.it](http://www.aerovac.it)

Aerovac Systèmes France  
[www.aerovac.fr](http://www.aerovac.fr)

Richmond Aircraft Products  
[www.richmondaircraft.com](http://www.richmondaircraft.com)

Aerovac Systems Ltd.

All statements, technical information and recommendations contained in this publication are based on tests believed to be reliable, but their accuracy and/or completeness are not guaranteed. The user shall determine the suitability for this particular purpose and shall assume all risk and liability in connection herewith. All values stated are nominal. For further details about tolerances please contact Aerovac Systems quality department.

Revised: February 2010